



NoteCart Unifit 16 Laptops

Sliding shelves


NoteCart Unifit 16 is a mobile storage and charging solution for 16 laptops.

NoteCart UniFit is a mobile cabinet for storing and charging laptops, Chromebooks and similar devices on 16 sliding shelves.

Henning Larsen Architects are behind the Nordic-inspired aesthetic design of the NoteCart UniFit series, a design with rounded corners that will fit into any environment.

The four wheels on the NoteCart UniFit series have been developed to be extremely robust at the same time as they complement the rest of the design, so that the NoteCart is easy to roll - regardless of the weight of the many laptops/Chromebooks and the type of flooring under the mobile cabinet.

During operation, all electronic parts and power adapters are stored in the locked space behind the steel cabinet so that only the person in charge of IT has access to them. A secure cable management system ensures that the cables stay in the cabinet once they have been installed.

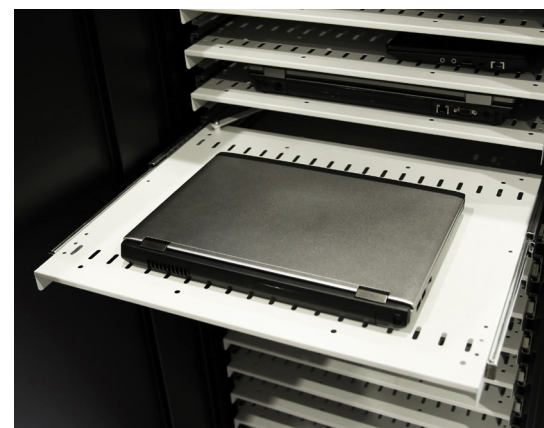

NoteCart Unifit 16 Laptops Solutions

- Designed with sliding shelves for storage, charging and transport of up to 16 laptops, Chromebooks or similar devices.
- The cabinet is sturdy and easy to transport on its rubber wheels, which have been thoroughly tested. 2 wheels are equipped with brakes.
- Strong handles on the sides make it easy to push and move the steel cabinet.
- The cabinet has a cable system which ensures that the cables do not disappear and that they are stored clutter-free.
- The standard key locks on the front and rear doors mean that devices are stored safely. On demand locks can be mechanical or electronic code locks.
- The fan ensures that devices are charged without the temperature rising unnecessarily.
- The Unifit Series can be customized to include a Thermostat to program and control special ventilation periods on demand.
- The Unifit Series can be customized to include a Timer to program and control special charging periods on demand.
- The Unifit Series is equipped with an RJ45 contact as standard and on demand the can be customized to include a switch bracket on which you can mount your preferred switch which will ensure your cable access to all devices inside the NoteCart.

DEVICES

Laptops, Chromebooks and similar devices

Designed for devices with a maximum thickness of 55 mm (see dimensions on page 3).

OPTIONAL PURCHASES

NoteSecure - Item no. NC-O-SECURE

Mechanical combination lock -
Item no. NC-O-CODE-MAN

Thermostat - Item no. NC-O-THERMO

Timer - Item no. NC-O-TIMER2

ITEM NUMBER

NoteCart Unifit 16, Sliding shelves
Item no. NCU-16-SH-SC



1



2



3



4



5

1. Storage, charging and transportation of up to 16 laptops on 16 shelves, on high-quality wheels with ball bearings.
2. Designated space behind the cart for storing power supplies, power panels and fan.
3. Sliding shelf in action.
4. Sturdy handles, on/off switch and cable holder on the side.
5. Key locks on the front and back doors are different (2x2 keys included).

NoteCart Unifit 16 Laptops, Sliding shelves

Technical specifications

Part Number: NCU-16-SH-SC

| | | | |
|----------------------------|--|--|--|
| EXTERIOR DIMENSIONS | | SLIDING SHELF DIMENSIONS | |
| Width (incl. handle) | 625 (805) mm | 16 shelves | |
| Depth | 625 mm | Width | 535 mm |
| Height | 1355 mm | Depth | 385 mm |
| | | Height | 55 mm |
| WEIGHT | 89 kg | MAX. WEIGHT PER SHELF | 25 kg |
| LOCKING SYSTEM | | SHELF TECHNICAL COMPARTMENT, DIMENSIONS | |
| Front door lock | 3 point lock, 2 keys included | Width | 295 mm |
| Back door lock | Standard key lock, 2 keys included | Depth | 120 mm |
| | | Height between shelves | 115 mm |
| CABLE MANAGEMENT | Yes | VENTILATION | Active fan, 36 dB with 2600 RPM CE/RoHS |
| CONNECTING CABLE | | WHEELS EN-12532 CERTIFIED | |
| Power connector output | C19, max. 16 AMP input | Material | Elastic rubber, strength 75 shore A |
| Cable length | 1.8 m | Type | Ball bearing |
| | | Capacity | 150 kg per wheel |
| CHARGING | AC | Diameter | 100 mm |
| MAINTENANCE | | ELECTRONICS | |
| Recommended maintenance | Wipe with a damp cloth | Main power panel | Voltage: 230 VAC 50/60 Hz Current: 16 A/10 A, max 3680 W Connectors: 4 x C13 per connector with 3 sec. delay |
| MATERIAL AND COLOUR | | Power panel | 16 sockets: Voltage: 25 VAC 50/60 Hz. Current: 10 A, max 2500 W. 5A fuse per 4 sockets. Number of groups: 4. |
| Cabinet/top | Stainless steel, black and grey powder coating | | |
| DISPOSAL | According to local standards | PACKAGING | Cardboard packaging, disposable. 100% recyclable |

Certifications

Wheels: EN 12532 certified
CE

Guarantee

2 years on the electrical components, 5 years on the body

leba-innovation.com