STORING OF DEVICES FOR SCHOOLS AND INSTITUTIONS



CHARGE IT, STORE IT, MANAGE IT



Fixed shelves

NoteCart Unifit 32 is a mobile storage and charging solution for 32 laptops.

NoteCart UniFit is a mobile cabinet for storing and charging laptops, Chromebooks and similar devices on 16 fixed shelves.

Henning Larsen Architects are behind the Nordic-inspired aesthetic design of the NoteCart UniFit series, a design with rounded corners that will fit into any environment.

The four wheels on the NoteCart UniFit series have been developed to be extremely robust at the same time as they complement the rest of the design, so that the NoteCart is easy to roll - regardless of the weight of the many laptops/Chromebooks and the type of flooring under the mobile cabinet.

During operation, all electronic parts and power adapters are stored in the locked space behind the steel cabinet so that only the person in charge of IT has access to them. A secure cable management system ensures that the cables stay in the cabinet once they have been installed.







CHARGE IT, STORE IT, MANAGE IT

NoteCart Unifit 32 Laptops Solutions

• Designed with fixed shelves for storage, charging and transport of up to 32 laptops, Chromebooks or similar devices.

• The cabinet is sturdy and easy to transport on its rubber wheels, which have been thoroughly tested. 2 wheels are equipped with breakes.

• Strong handles on the sides make it easy to push and move the steel cabinet.

• The cabinet has a cable system which ensures that the cables do not disappear and that they are stored clutter-free.

• The standard key locks on the front and rear doors mean that devices are stored safely. On demand locks can be mechanical or electronic code locks.

• The fan ensures that devices are charged without the temperature rising unnecessarily.

• The Unifit Series can be customized to include a Thermostat to program and control special ventilation periods on demand.

• The Unifit Series can be customized to include a Timer to program and control special charging periods on demand.

 The Unifit Series is equipped with an RJ45 contact as standard and on demand the can be customized to include a switch bracket on which you can mount your preferred switch which will ensure your cable access to all devices inside the NoteCart.

DEVICES

Laptops, Chromebooks and similar devices

Designed for devices with a maximum thickness of 55 mm (see dimensions on page 3).

OPTIONAL PURCHASES

NoteSecure - Item no. NC-O-SECURE Mechanical combination lock -

Item no. NC-O-CODE-MAN


Thermostat - Item no. NC-O-THERMO Timer - Item no. NC-O-TIMER2

ITEM NUMBER

NoteCart Unifit 32, Fixed shelves *Item no. NCU-32-FH-SC*





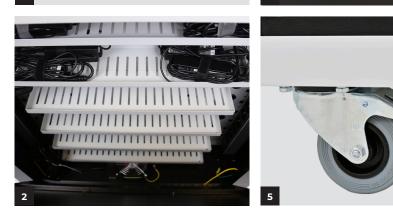

- 1. Storage, charging and transportation of up to 32 laptops across 16 shelves with 2 devices on each shelf.
- 2. Designated space behind the cart for storing power supplies, power panels and fan.
- 3. Key locks on the front and back doors are with different keys (2x2 keys included).
- 4. Sturdy handles, on/off switch and cable holder on the side.
- 5. High-quality wheels with ball bearings and proper rubber content. 2 wheels out of 4 are with brakes.

leba-innovation.com



NoteCart Unifit 32 Laptops, Fixed shelves Technical specifications

Part Number: NCU-32-FH-SC

EXTERIOR DIMENSIONS		SHELF DIMENSIONS	16 shelves (2 units on each shelf)
Width (incl. handle)	870 (1050) mm	Width	780 mm
Depth	700 mm	Depth	436 mm
Height	1355 mm	Height	55 mm
WEIGHT	130 kg	MAX. WEIGHT PER SHELF	25 kg
LOCKING SYSTEM		SHELF TECHNICAL COMPA	ARTMENT, DIMENSIONS
Front door lock	3 point lock, 2 keys included	Width	515 mm
Back door lock	Standard key lock, 2 keys	Depth	120 mm
	included	Height between shelves	115 mm
CABLE MANAGEMENT	Yes	VENTILATION	Active fan, 36 dB with 2600 RPM CE/RoHS
CONNECTING CABLE		WHEELS EN 12532 CERTIFIED	
Power connector output	C19, max. 16 AMP input	Material	Elastic rubber, strength 75 shore A
Cable length	1.8 m	Туре	Ball bearing
		Capacity	150 kg per wheel
CHARGING	AC	Diameter	100 mm
MAINTENANCE		ELECTRONICS	
Recommended maintenance	Wipe with a damp cloth	Main power panel	Voltage: 230 VAC 50/60 Hz Current: 16 A/10 A, max 3680 W Connectors: 4 x C13 per
MATERIAL AND COLOUR Cabinet/top	Stainless steel, black and grey powder coating	Power panel	connector with 3 sec. delay 32 sockets: Voltage: 25 VAC 50/60 Hz. Current: 10 A, max 2500 W. 5A fuse per 4 sockets.
DISPOSAL	According to local standards	PACKAGING	Cardboard packaging, disposable. 100% recyclable

Certifications Wheels: EN 12532 certified CE

Guarantee

2 years on the electrical components, 5 years on the body

leba-innovation.com